

S.M.P.S

Enclosed Switching  
Power Supply

Low Cost Type

**350L2 Series**

350W SINGLE OUTPUT



- ▷ Constant voltage design
- ▷ Low cost, high reliability
- ▷ AC200-240V input
- ▷ Protections:
  - Overload/Over voltage /Short circuit
- ▷ 100% full load burn-in test
- ▷ Suitable for LED lighting and industrial applications
- ▷ Safety standards :
  - design refer to K61347-2-1,K61347-2-13
- ▷ EMC standards :
  - design refer to K00015,K61547,K61000-4-2, 3,4,5,6,11
- ▷ 2years warranty

CB CE


ITEM		UP350S12L2
INPUT	VOLTAGE RANGE	AC200~240V
	FREQUENCY RANGE	47~63Hz
	EFFICIENCY(typ.)	85%
	AC CURRENT(typ.)	2.5A/230VAC
	INRUSH CURRENT(typ.)	COLD START 65A/230VAC
	LEAKAGE CURRENT	<3.5mA / 230VAC
OUTPUT	DC VOLTAGE	12V
	RATED CURRENT	29A
	RATED POWER	348W
	RIPPLE&NOISE(max.) Note2	170mVp-p
	VOLTAGE ADJ. RANGE	±5%
	VOLTAGE TOLERANCE Note3	±3%
	LINE REGULATION Note4	±1%
	LOAD REGULATION Note5	±2%
	SETUP,RISE TIME(typ.)	1000ms,20ms/230VAC at full load
	HOLD UP TIME(typ.)	15ms/230VAC at full load
PROTEC-TION	SHORT CIRCUIT	Hiccup mode ; recovers automatically after fault condition is removed
	OVERLOAD	Over 110% of rating ; recovers automatically after fault condition is removed
	OVER VOLTAGE	115~140% of rating
ISOLA-TION	WITHSTAND VOLTAGE	I/P-O/P:AC3KV, I/P-F.G:AC1.5KV, O/P-F.G:AC0.5KV
	ISOLATION RESISTANCE	I/P-O/P, I/P-F.G, O/P-F.G:DC500V 100Mohms(At room temp. & humid.)
ENVIRON-MENT	WORKING TEMP.&HUMID.	-20~+60℃ ( Refer to "DERATING CURVE" ),20~95%RH
	STORAGE TEMP.&HUMID.	-30~+75℃,10~95%RH
	VIBRATION	10~500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
OTHERS	DIMENSION	215*115*50mm(L*W*H)
	WEIGHT	0.95Kg
NOTE		1. All parameters not specially mentioned are measured at 220vac input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with 0.1 uF & 47uF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Line regulation is measured from low line to high line at rated load. 5. Load regulation is measured from low 0% to 100% rated load.

# S.M.P.S



## Enclosed Switching Power Supply

## Low Cost Type


### BLOCK DIAGRAM

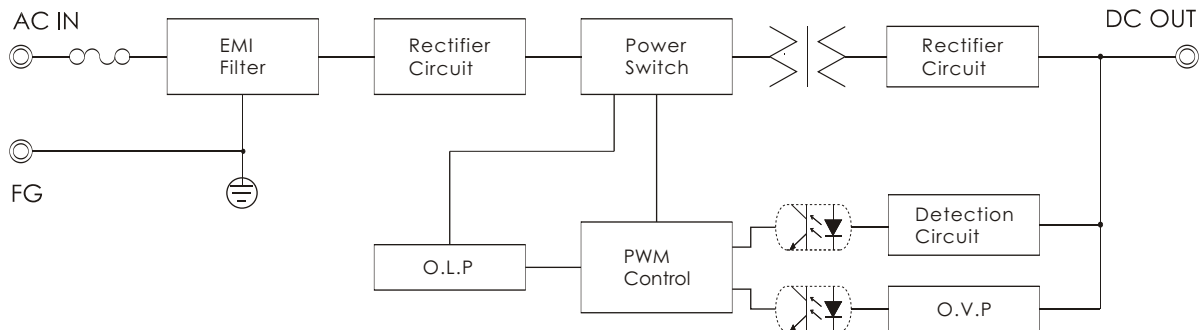

### DIMENSIONS(unit:mm)

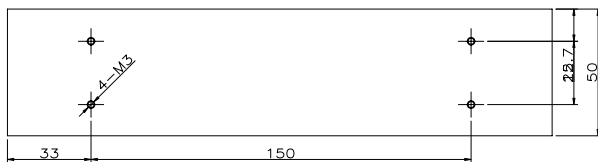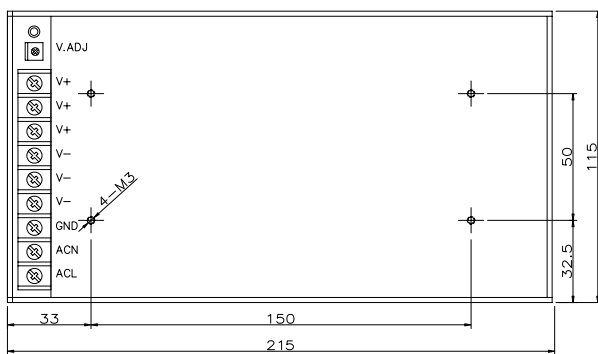

### DERATING CURVE

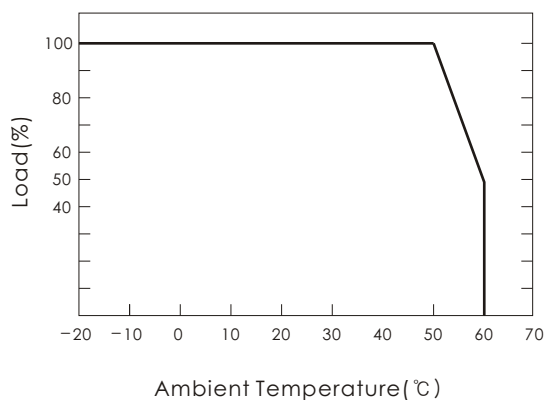

### STATIC CHARACTERISTICS

